



200 Universal Dr. • Owosso • MI 48867
 989-725-8354 • Fax 989-725-8409
 1-800-433-3604

Installation Kit No. LIK-14 (105)



8 49030 00496 7


Contents: (2) Long Molding Strips
 (2) Short Molding Strips
 (9) 1" Self-tapping Screws
 (2) Alcohol pads

Tools Required:

- 9/16" wrench
- Electric drill with Phillips point

Tailgate cover Installation

1. Remove the two factory installed tailgate bolts, which correspond with the pre-drilled holes in the tailgate liner (Save the bolts).
2. Place the tail gate cover onto the truck's tailgate and line up the two pre-drilled holes with the bolt holes from step 1.
3. Replace the bolts removed in section 1. **(Do not tighten bolts at this time).**
4. Locate the 5 dimples on the perimeter of the tailgate cover and install one of the self-taping screws provided on each dimple location.
5. Tighten factory installed bolts securely.

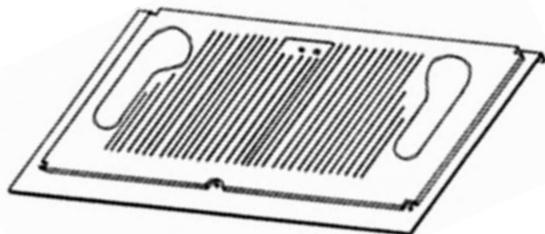

Bedliner Installation

Preparations: Using the alcohol pads provided, clean all surfaces of the truck-box where the molding adhesive will be in contact.

- Step 1.** Starting at the rear end of Bedliner driver's side wall, place one long molding strip and one short strip with the adhesive facing towards truck-box.
- Step 2.** Repeat Step 1 on the passenger's side.
- Step 3.** Place Bedliner into the Truck-box.
- Step 4.** Beginning at the front driver's side, peel approximately 12" of the protective backing away adhesive strip; butt the top of the molding strip up to the plastic rail cap and press adhesive firmly on to the side wall of truck-box.
- Step 5.** Continue to peel away 12" of backing strip at a time keeping the molding strip tight against the plastic rail cap and straight along the side wall of truck-box.
- Step 6.** Repeat Steps 3 and 4 to the passenger's side.
- Step 7.** Locate dimples on both sides of liner, and install self-taping screws to secure the liner.

